# WENDELIGHTING®

DIVISION OF JACKSEN INTERNATIONAL LTD

**Wenlux® 717TL**
**Track Mount Art Light**
**LED**

The Wenlux® 717TL Track Mount Accent Light includes a low profile track adapter with an integral LED driver. White to warm high color rendering LED chips were discriminately selected to enchance fine art and furnishings.

The LM Lighting Modules include the track adapter/driver, LED Chip, proprietary optics and cooling system. Lighting Modules accept the Accent Light (Adapter Cone) to which a series of adjustable Lens Holder Tubes with spherical lenses are positioned within to optically control variable beam spreads. Beam spreads can be further altered using Light Control Accessories. Multiple Light Control Accessories can be positioned within the rotational Lens Holder Cone.

717TL provides rotational adjustment using lockable fastening systems. Dual heat sink technology provides optimum LED cooling. The track adapter includes a locking feature for positive luminaire engagement to track. The luminaire is suitable for use on track installed to a ceiling, the side of an exposed beam or wall.

Wenlux® 717TL is only listed for use with Stucchi's surface and recessed Onetrack. The track adapter/driver also engages to Nordic Aluminum Global Track Pulse XTSC. The tracks include a two wire data or analog bus link for use when applicable.




Wendelighting reserves the right to make changes without notice.

**Power:** 120 - 277V VAC Input - 20 Watts
**Adapters:** Lighting Module Track Adapter Options include Circuit Dimming Groups to Individual Control
**Dimming:** Track Adapter Options Include Phase Control - Digital Control - Wireless Control and 0-10V Control
**Tested:** **LMAC** with **2790** Chip and Primary Optics JA8 Tested - 1500 Lumens @ 500mA - 74 Lumens/Watt
**Optics:** Proprietary
**Luminaire:** Aluminum
**Mounting:** Beam - Ceiling - Wall
**Listings:** UL / CUL LISTING - Dry Location - Listing For Use Only with STUCCHI 120V - 3 Circuit-Onetrack UL Models:
- 9000 - UL - ST - 120 (Surface Track)
- 9000 - UL - R - 120 (Recessed Track)

**Certification:** California Title 24 Residential Lighting JA8 Listing

Inseparable
**JA8 Lighting Module**



## TRACK MOUNT ART LIGHT OPTIONS

**717 - TL - LM __ __ - __ __ __ __ - __ __ - __ __ - __ __**

**Adapter Cone:**
**Accent Light**

**Track Mount**

**Lighting Module:**

**LMPC**
(Standard)
3 Circuit Track Adapter - Shared Neutral
Forward / Reverse Phase Control Dimmable 1%
Use ELV Dimming
120 - 277V In / 500mA Out

**LMDC**
(Special Order)
Individual Dimming Control
Data Bus Track Adapter
Digitally Addressable Dimming Control
Dali® 1 Compatible (Not Dali Certified)
Dimmable 1%
120 - 277V In / 500mA Out

**LMAC**
(Special Order)
Analog Bus Track Adapter
0-10 Volt Dimming Control Dimmable 2%
120 - 277V In / 500mA Out

**LMCC**
(Special Order)
Individual Dimming Control
Wireless Bluetooth Track Adapter
Casambi® Control Dimmable 1%
Casambi® Ecosytsem iOS / Android
120 - 277V In / 500mA Out

**LMXC**
(Special Order)
Individual Dimming Control
Wireless Bluetooth Track Adapter
Xicato® Control Dimmable 1%
Xicato® Ecosystem - BLE Beacon Technology
Xicato® Control PC/IOS
120 - 277V In / 500mA Out

**LED Chip Options (Chip Values @ 500mA:)**

**2798**
2700K 98 CRI
1450 Lumens
R9 93

**3098**
(Standard Chip)
3000K 98 CRI
1550 Lumens
R9 88

**2790**
(Special Order)
2700K 90 CRI
1650 Lumens
R9 54

**3090**
(Special Order)
3000K 90 CRI
1750 Lumens
R9 60

**Optical Lens Holder Tube (Beam Spread):**

**NBS**
Zoom
14°- 28°

**MBS**
Zoom
30°- 40°

**WBS**
50°

**VWB**
63°

**Fixture Color:**

**BLK**
Black

**WHT**
White

**Light Control Accessories:**

**FI**
Fade In®
0° Softening Lens

**SF**
14° Soft Focus Lens

**SL**
28° Spread Lens

**RL**
0° x 48° Rectilinear Lens

**HL**
Hexcell Louver

**1F**
100 Kelvin Warming Filter
39mm Diameter


**Color Filter Options:** Additional 39mm Diameter Dichroic Color Filters Available Through Rosco


STUCCHI and Onetrack are Registered Trademarks of A.A.G. STUCCHI.
Nordic Aluminum and Global Track Pulse are Registered Trademarks of Nordic Aluminum Lival Group.
Xicato® is a Registered Trademark of Xiacto Inc.
Casambi® is a Registered Trademark of Casambi Technologies Oy/Inc.
Dali® is a Registered Trademark of the Digital Illumination Interface Alliance.

WENDELIGHTING / DIVISION OF JACKSEN INTERNATIONAL LTD. - P.O. BOX 337 - 363 BELL STREET - LOS ALAMOS, CALIFORNIA 93440
(800) 528-0101 Fax (626) 303-0046 www.wendelighting.com e-mail: info@wendelighting.com

Copyright © 2022 Jacksen International. Ltd. All rights reserved

# Wenlux® 717TL Track Mount Art Light LED

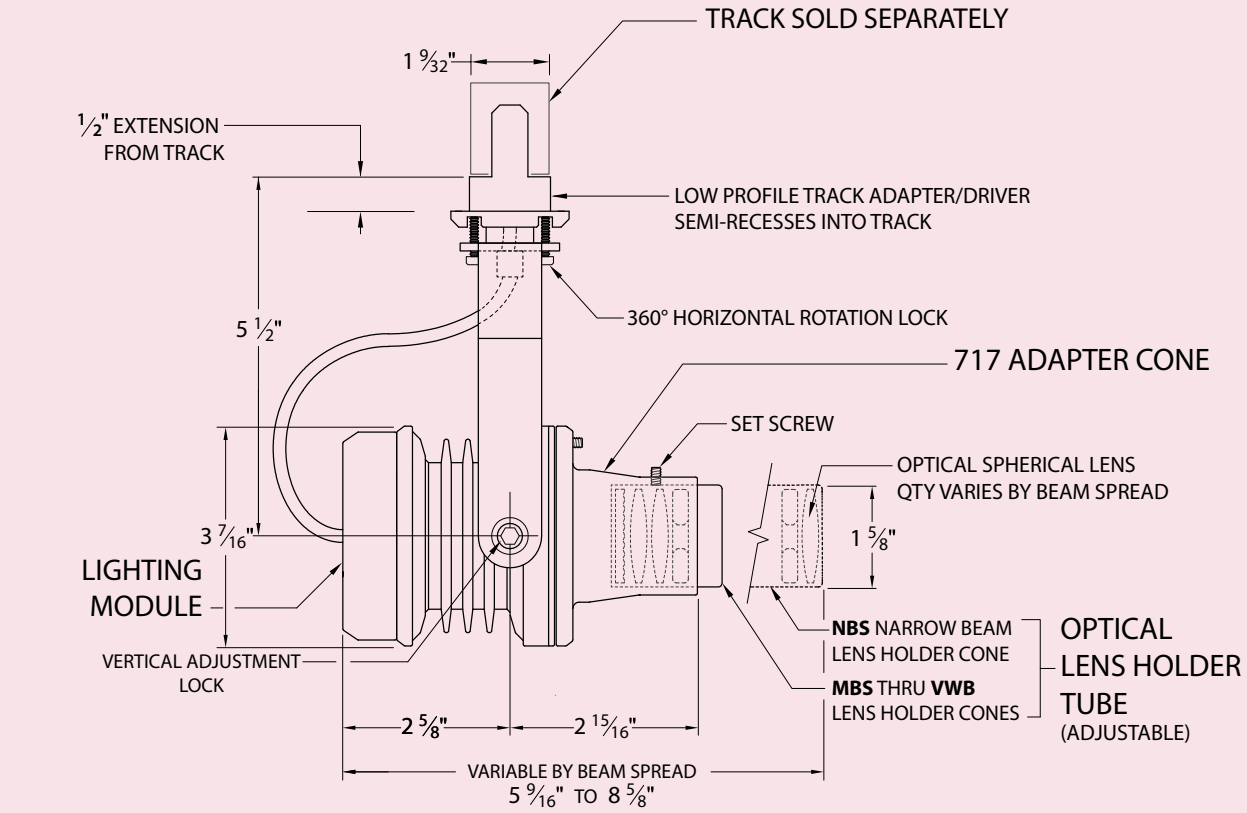

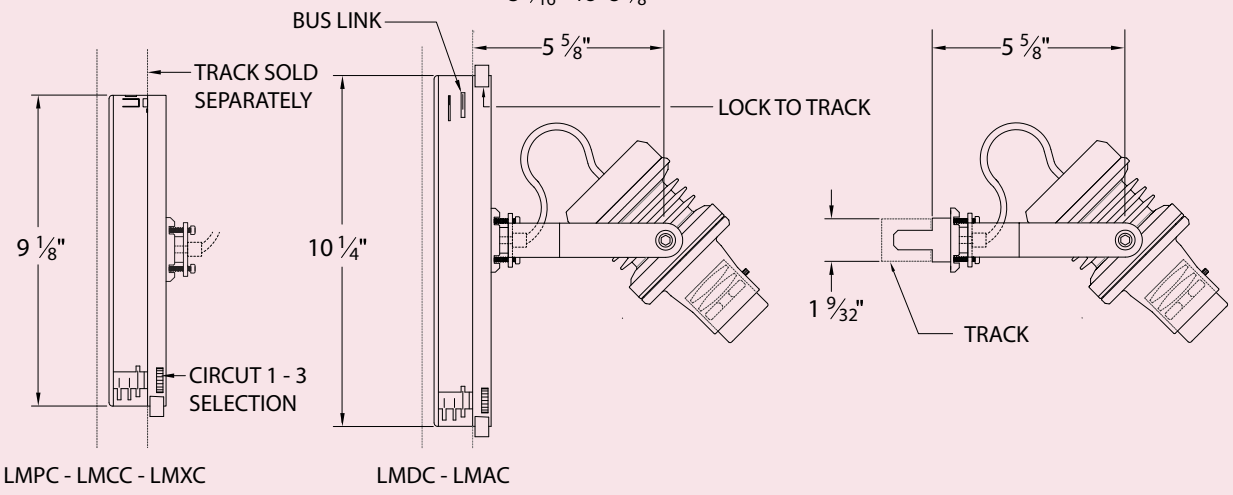




## LIGHT CONTROL ACCESSORIES


Degrees shown are approximate on an NBS Cone. Results may vary substatially using wider MBS thru VWB beam spread cones.




0°
Softening Lens
**FI**



14°
Softening Lens
**SF**




28°
Spread Lens
**SL**



0° x 48°
Rectalinear Lens
**RL**



Hexcel Louver
(Black)
**HL**



100 Kelvin
Warming Filter
**1F**

**HOW TO SPECIFY**

To specify, please visit *www.wendelighting.com/art-light-worksheets/* complete the appropriate Art Lighting Worksheet and forward the completed worksheet to our staff members at *info@wendelighting.com*.

WENDELIGHTING®

The name Wendelighting is a registered trademark to Jacksen International Ltd., Monrovia, California. The name encompasses Wendel® and Wenlux® as well as other types of Wendel/Wenlux lighting fixtures for both interior and exterior use.

DIVISION OF JACKSEN INTERNATIONAL LTD

Copyright © 2022 Jacksen International. Ltd. All rights reserved